




 ETOILE

RITMICA® WOOD D1




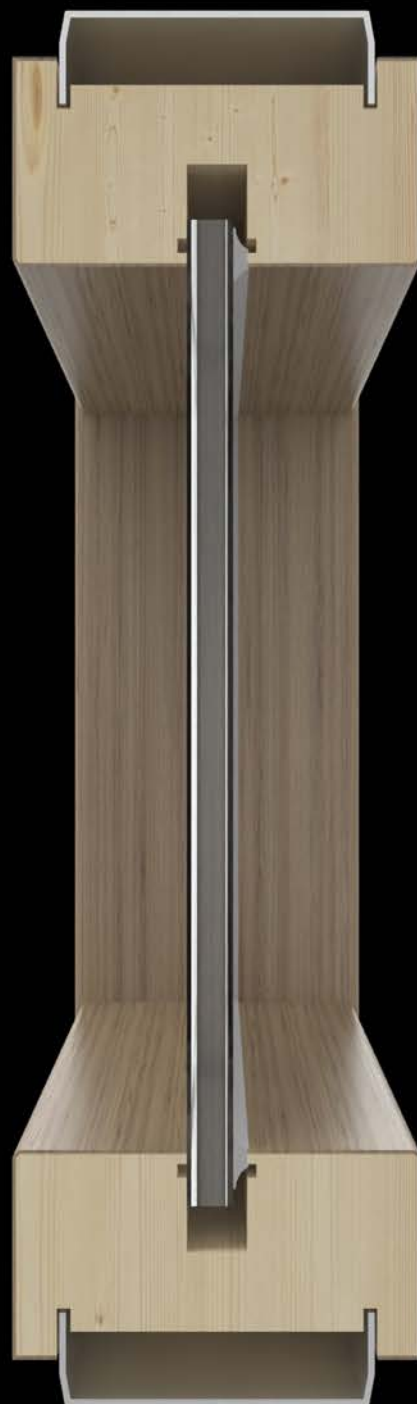

- 01.** Thickness: 92 mm
- 02.** Veneered laminated wood structure
- 03.** Wood slats are joined with the “finger joint” technique
- 04.** Floor profiles are in 6060 UNI 9006/1 extruded aluminium, concealed to ensure impermeability
- 05.** Single central glass - 55.1/55.2/66.1/66.2 laminated glass or 10-12-mm-thick tempered glass
- 06.** Fixed corner profiles
- 07.** Vertical junctions between glazed elements, made of wood, polycarbonate or transparent two-sided tape
- 08.** Door frame with cable routing
- 09.** Utility module
- 10.** 5 versions of hinged doors - solid, tempered glass and framed
- 11.** 3 versions of external sliding doors - solid, tempered glass and framed




Wall-end uprights

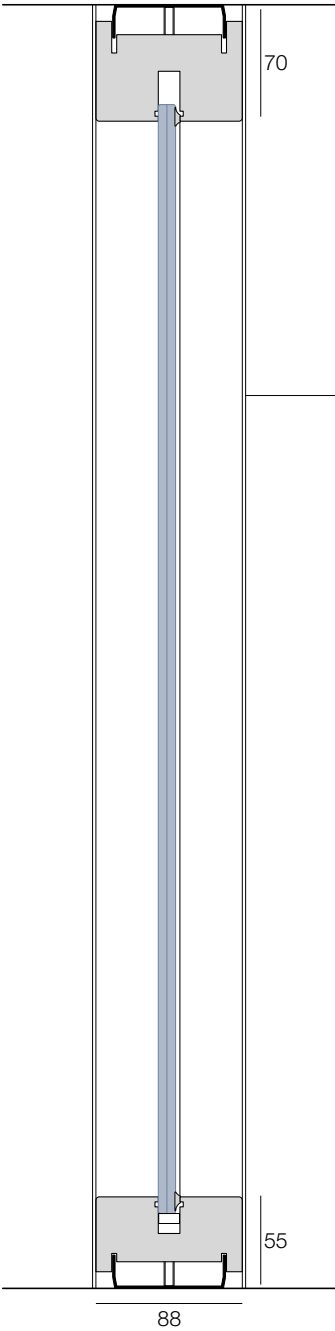


55.1/55.2 laminated glass
66.1/66.2 laminated glass

10-mm-thick tempered glass
12-mm-thick tempered glass

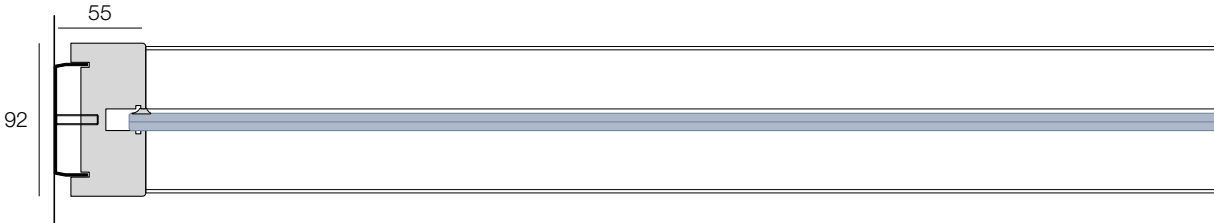


Fixed wall-end upright

Wall-end uprights

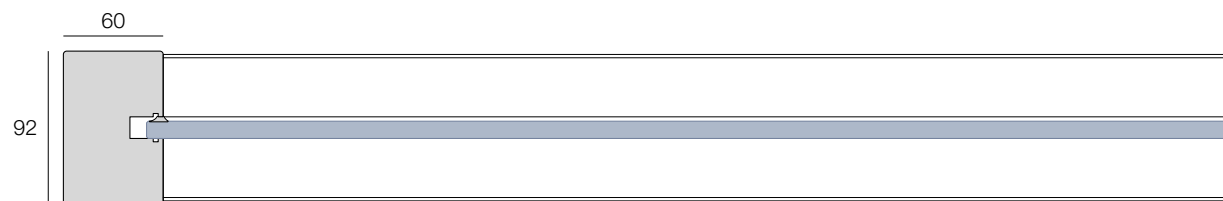


End profile

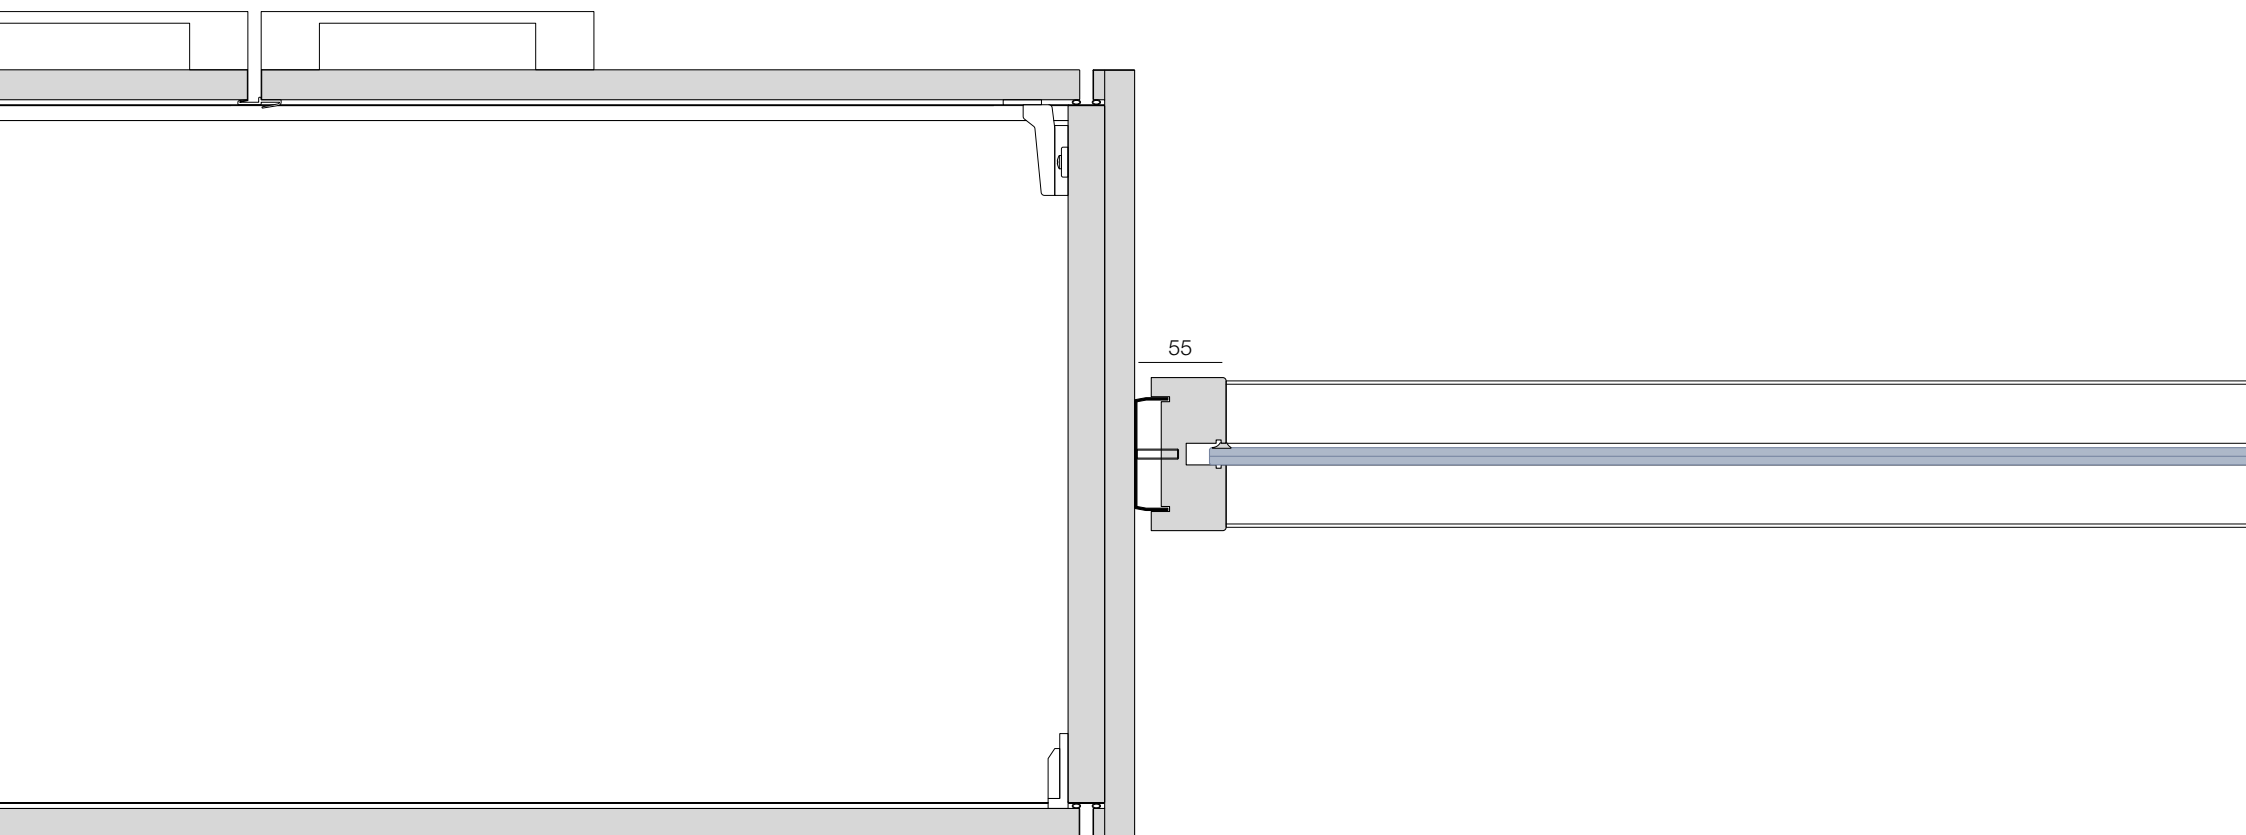

Storage-end upright

Junction profiles

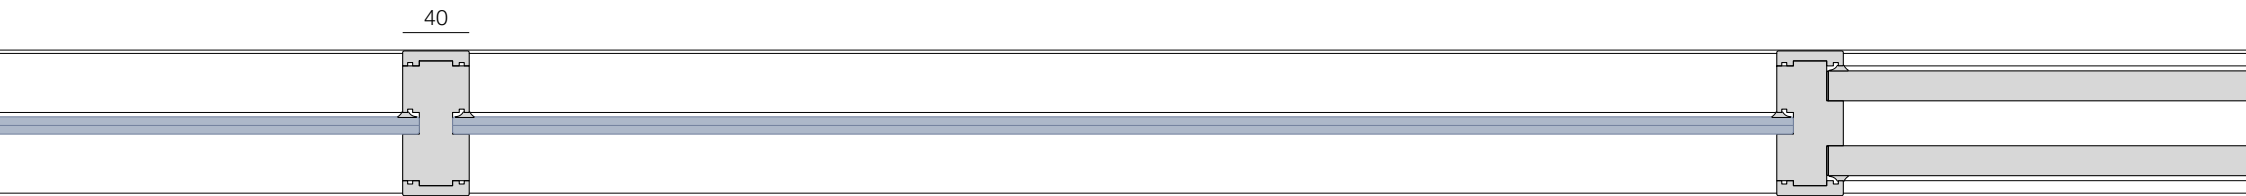


Junction

Junction


Ritmica Wood D1 - Ritmica Wood D1

Ritmica Wood D1 - Ritmica Wood Solid

Junction profiles

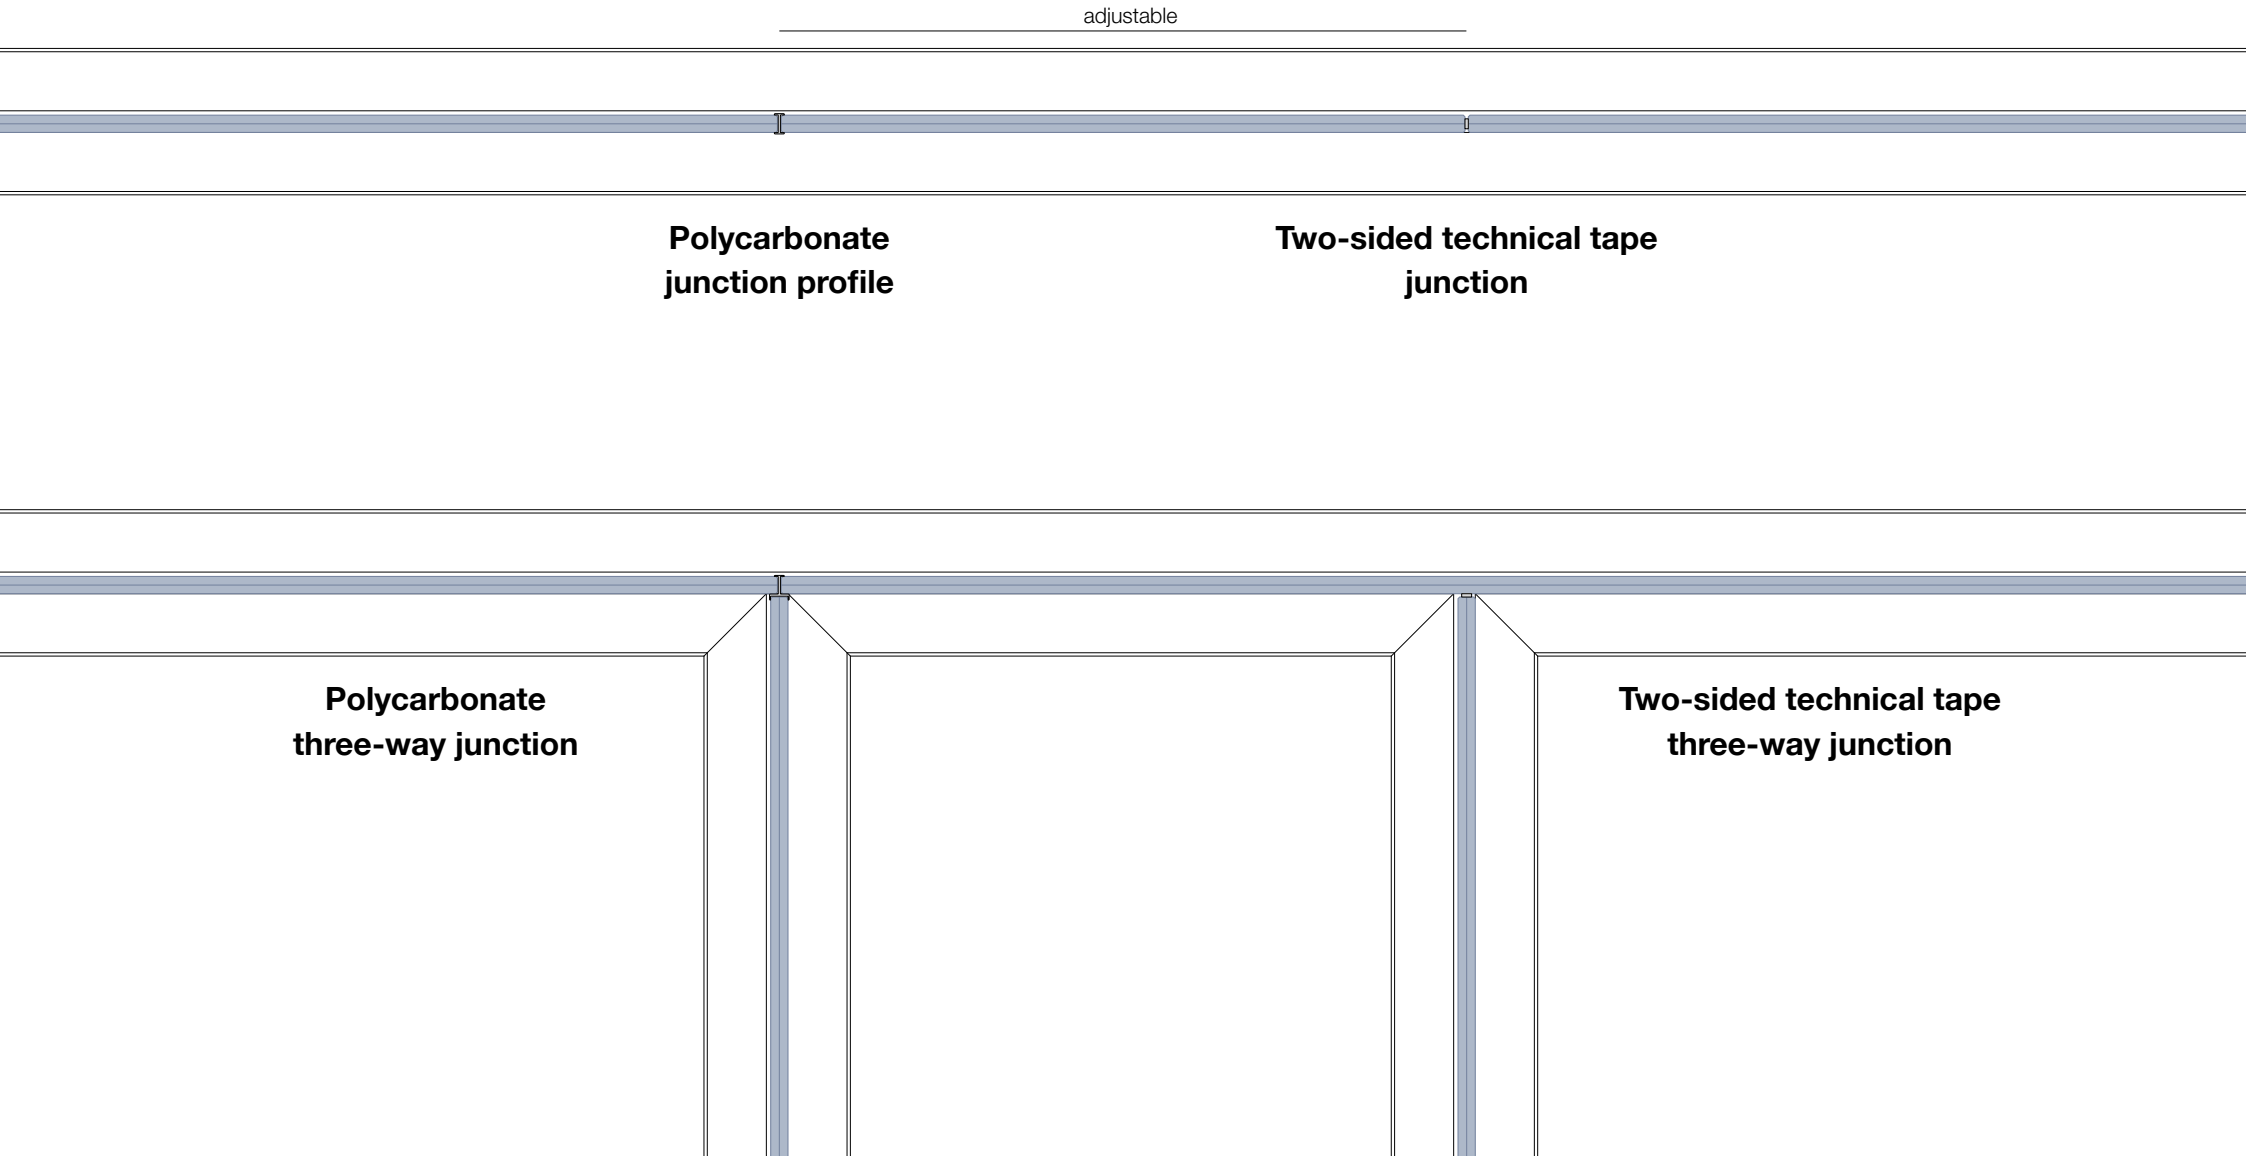


Corner profiles

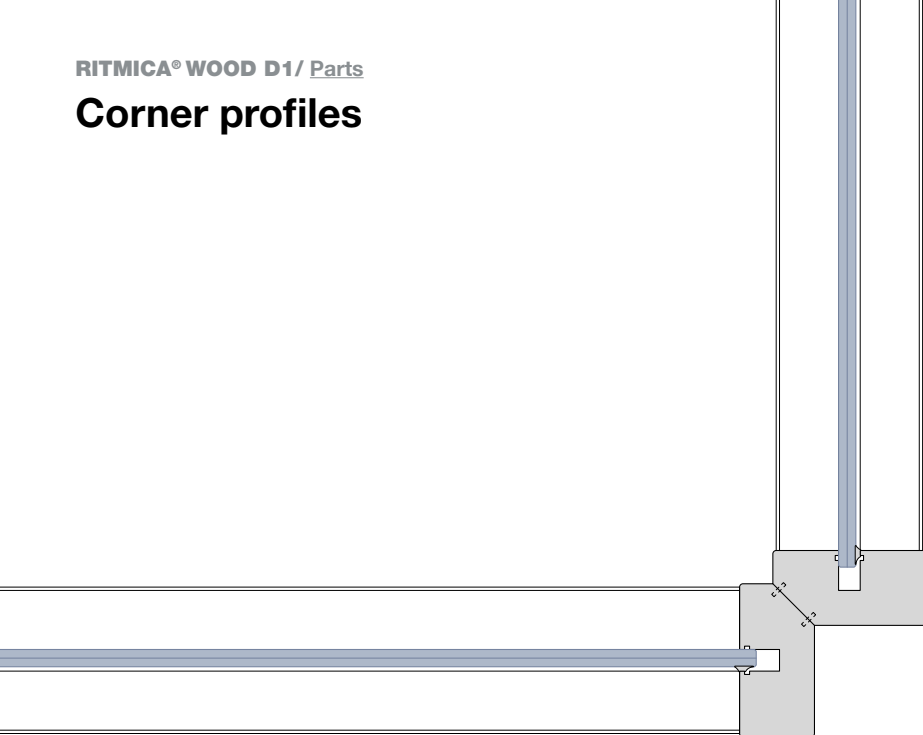


**Wooden 90° corner profile
single central glass**



**Wooden 90° corner profile
solid/single glass**

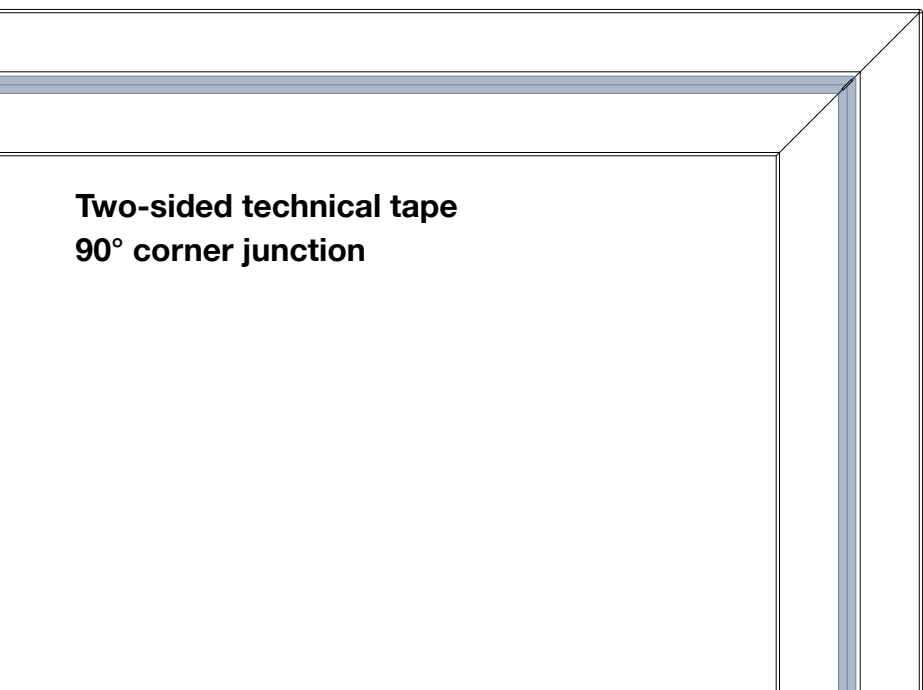


**Two-sided technical tape
90° corner junction**

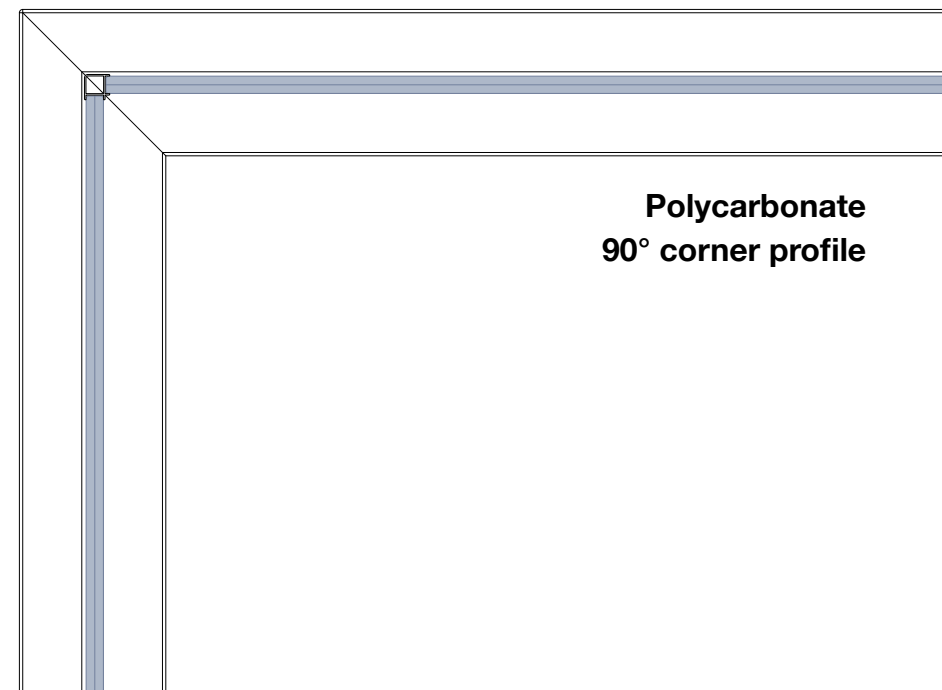


**Polycarbonate
90° corner profile**

Cabling and utility module
for hinged doors

Utility module

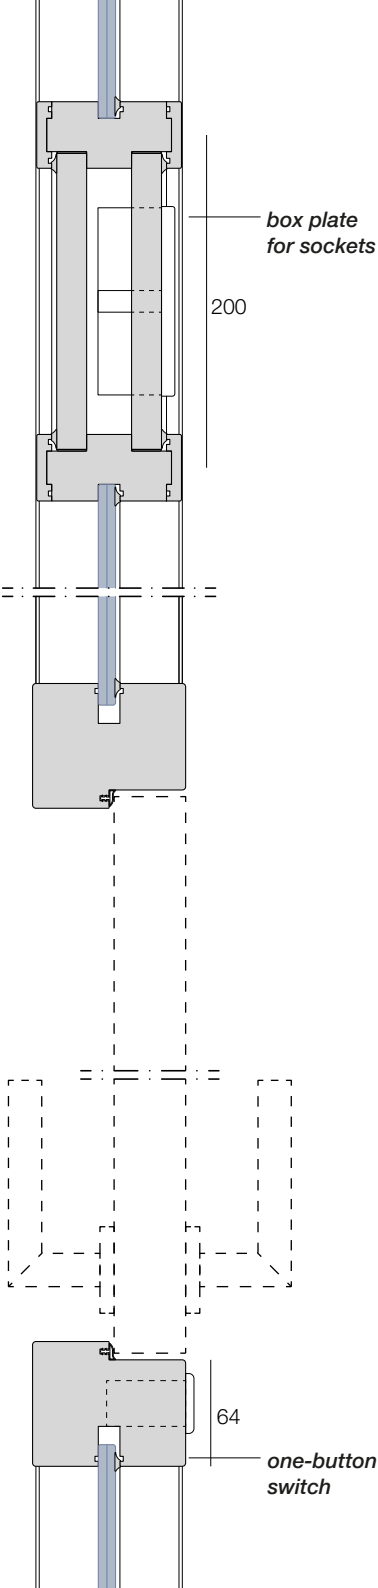

Cabling solution

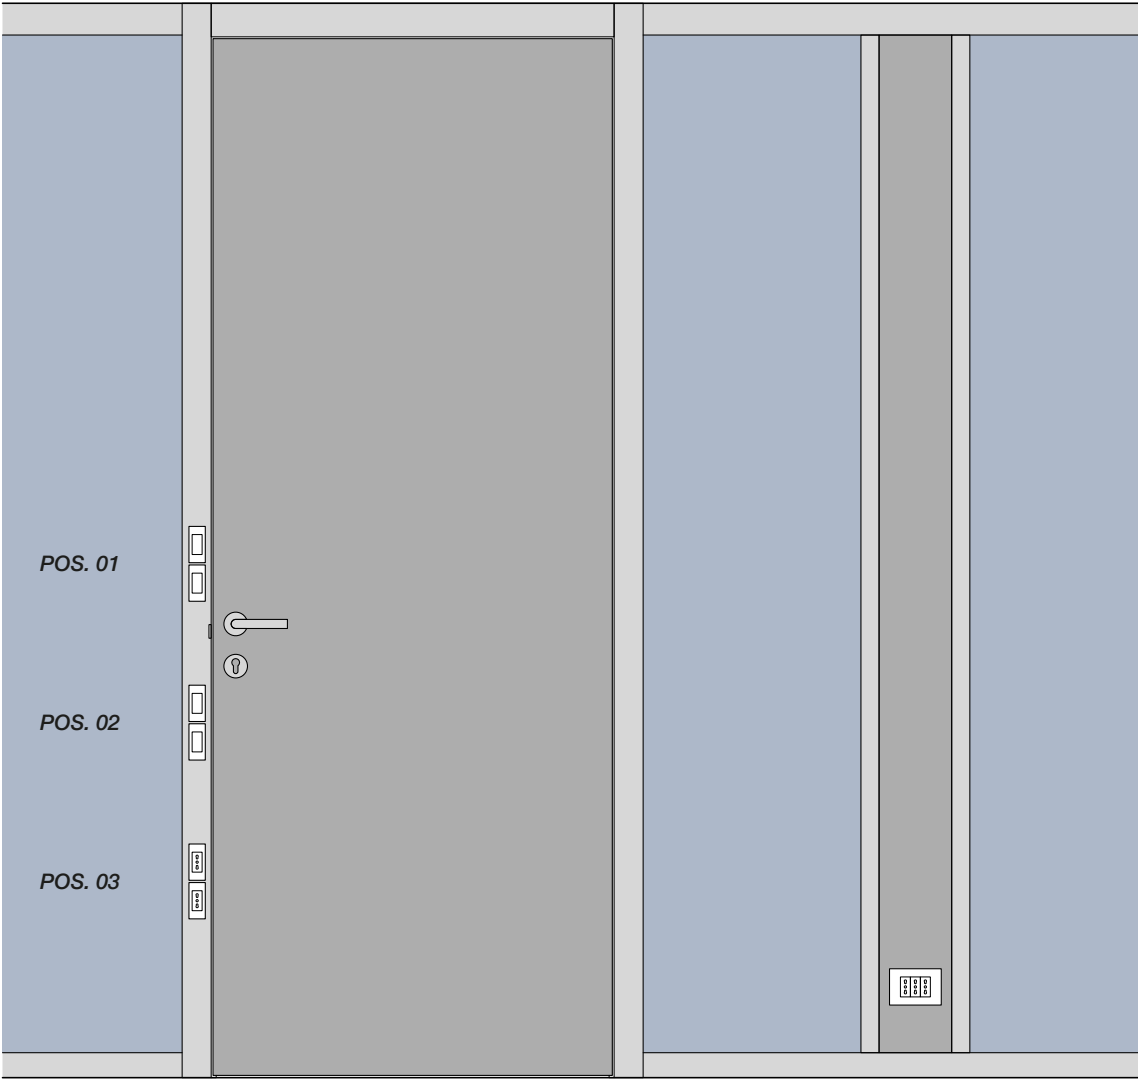


*possible positions for switches and sockets on the door frame



Cabling and utility module for sliding doors



Utility module

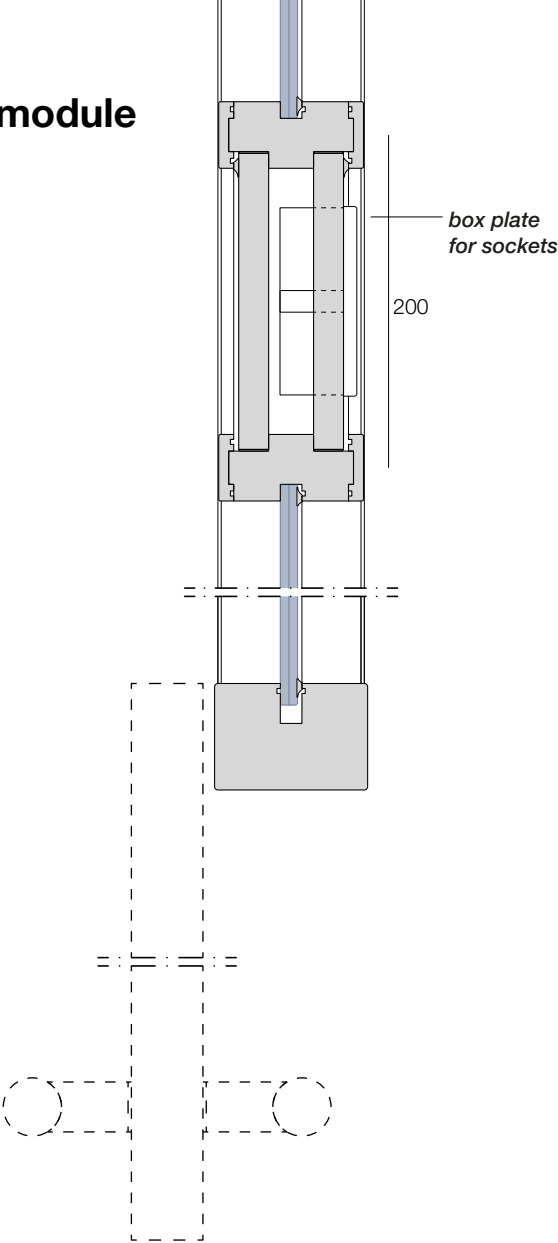

Cabling solution

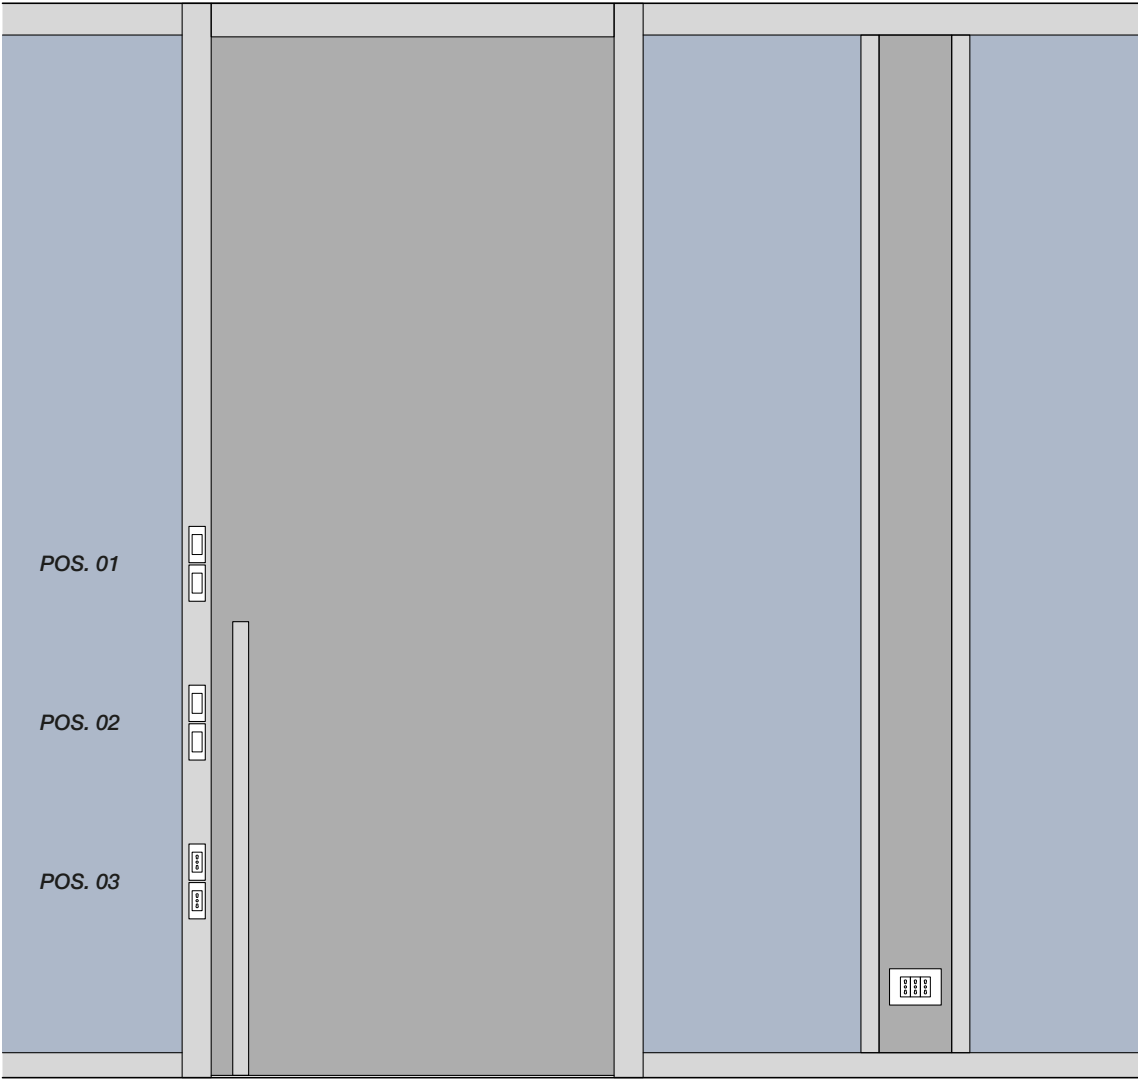

*possible positions for switches and sockets on the door frame


RITMICA®
WOOD

Doors and handles


FRAMES FOR HINGED DOORS




Door frame on **Ritmica Wood D1**

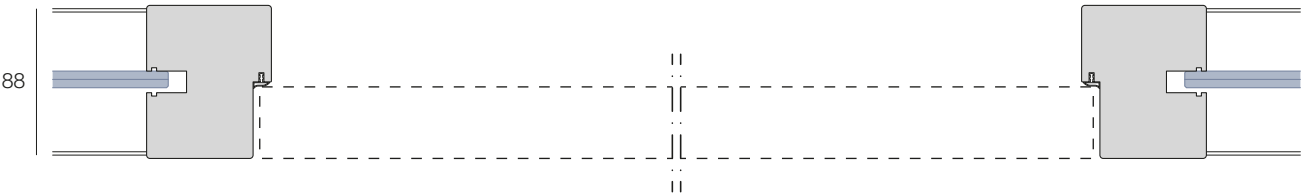


Door frame on **Ritmica Wood D2**

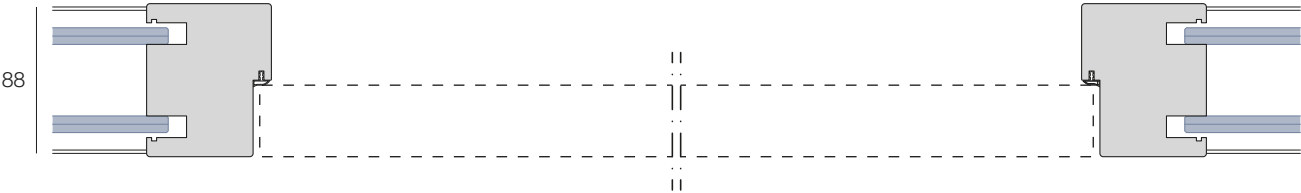

Door frame on **Ritmica Wood Solid**

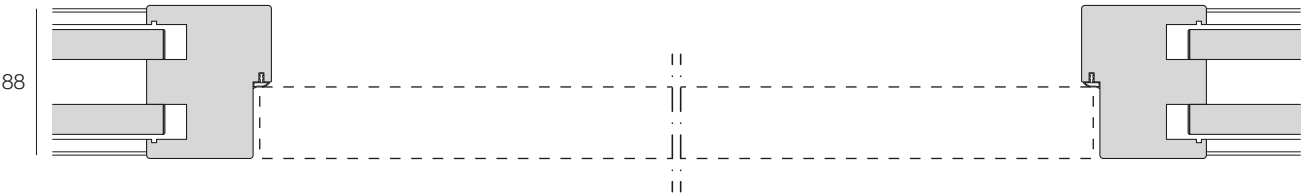


SOLID DOOR LEAF 43 mm thick

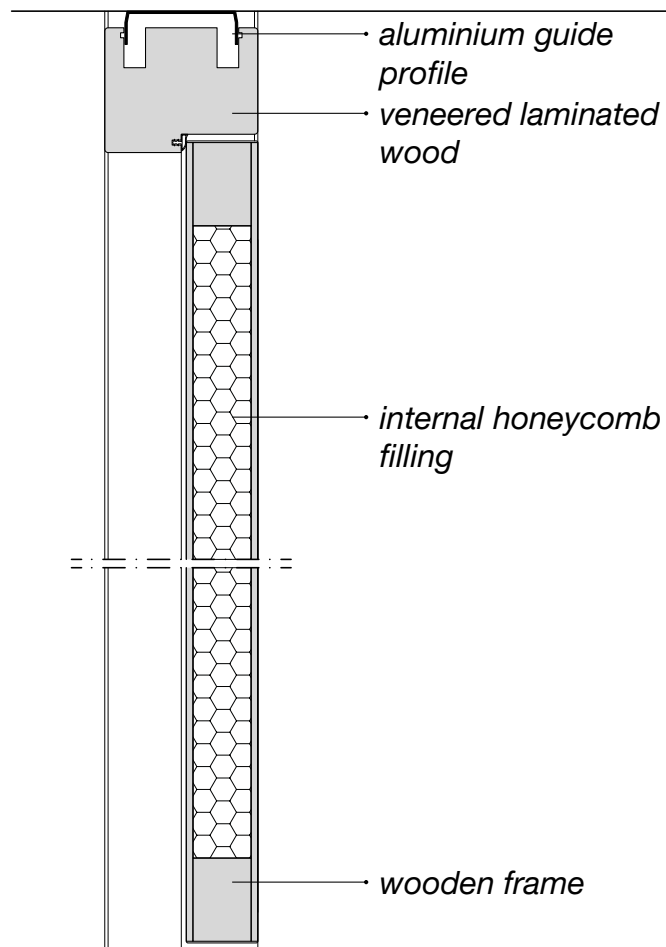


CHARACTERISTICS


- 01. concealed hinge
- 02. visible or concealed door closer
- 03. switch on door upright
- 04. recessed dust seal

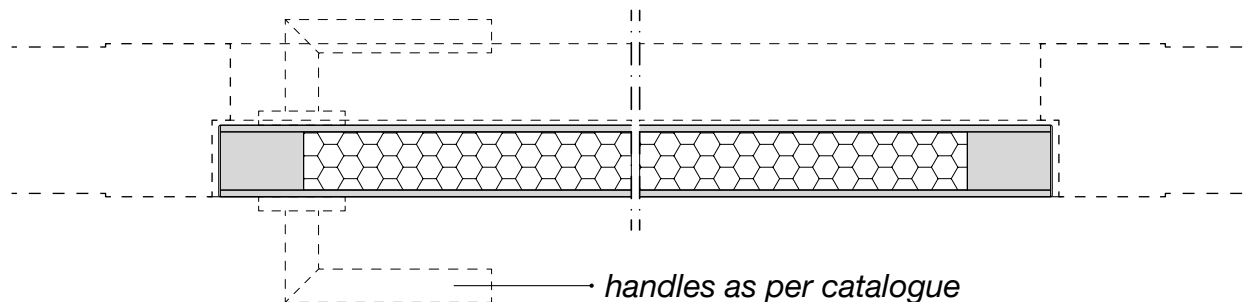


SOLID DOOR LEAF 43 mm thick




ML1




ML4




ML5




ML6




ML7




ML8




ML9




ML10



ML11




MLQ




MLT

SOLID DOOR LEAF 92 mm thick

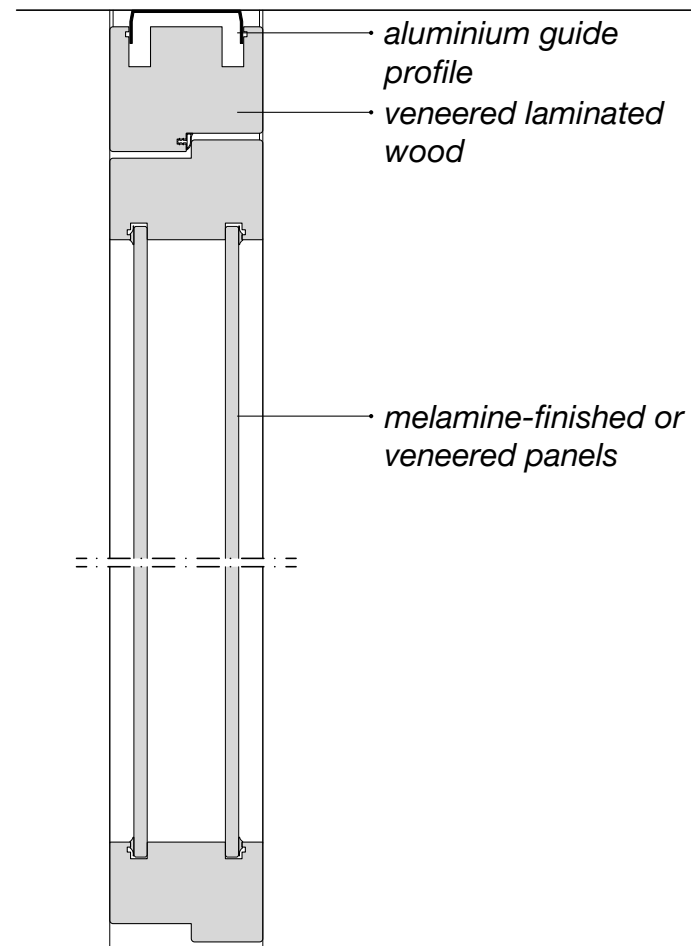


CHARACTERISTICS


- 01.** concealed hinge
- 02.** visible or concealed door closer
- 03.** switch on door upright
- 04.** recessed dust seal

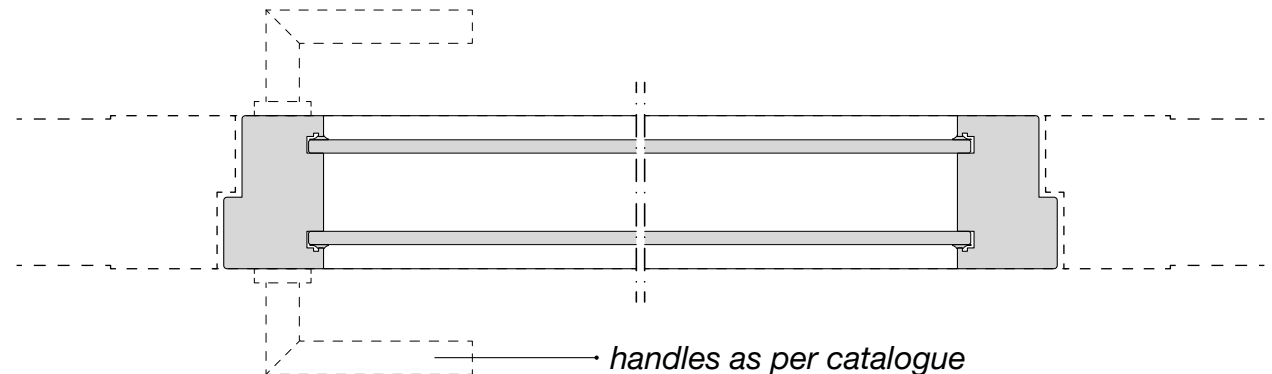


SOLID DOOR LEAF 92 mm thick




ML5




ML6




ML7




ML8




ML9




ML10



ML11




MLQ



MLT



TEMPERED GLASS DOOR LEAF_ANODIZED FULL-HEIGHT HINGE 10 mm thick

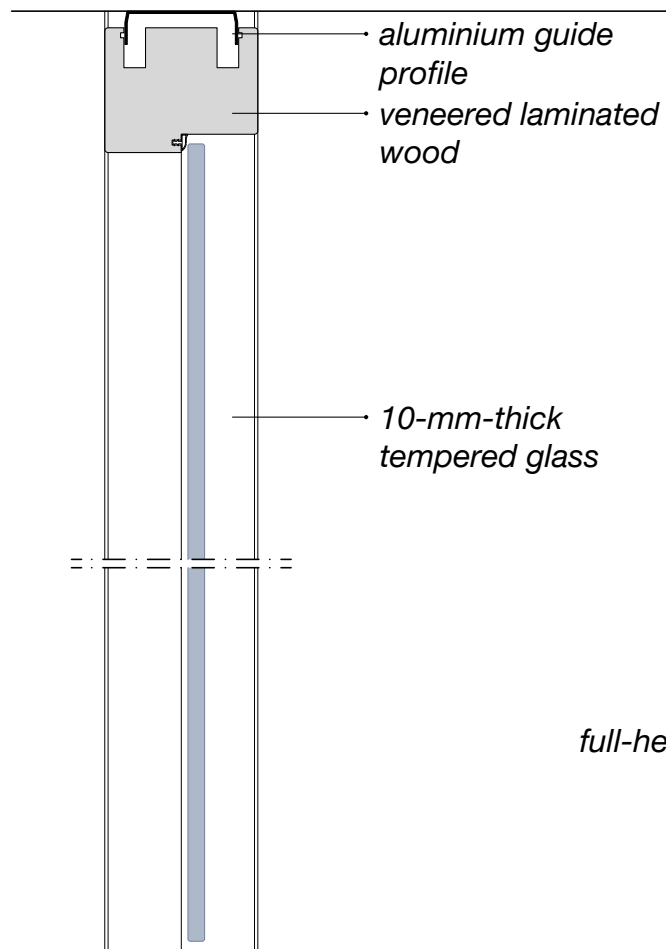


CHARACTERISTICS

- 01.** full-height hinge - 180°
- 02.** visible door closer
- 03.** handle with glass adapter
- 04.** switch on door upright
- 05.** external dust seal


full-height hinge detail

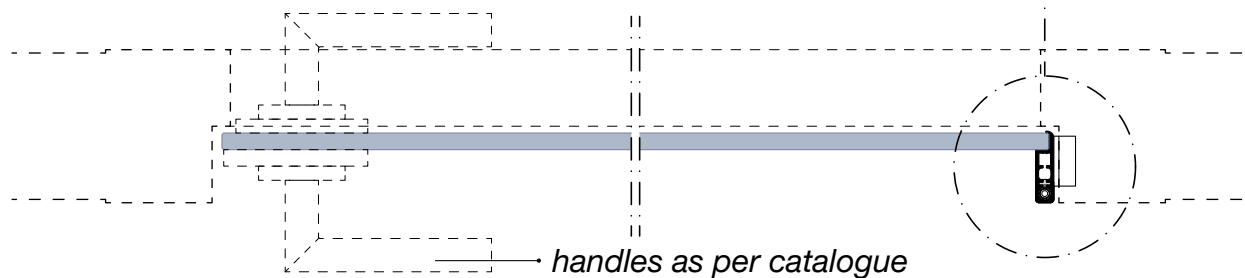


TEMPERED GLASS DOOR LEAF_ANODIZED FULL-HEIGHT HINGE 10 mm thick




MC1




MC4




MC5




MC5V




MC6




MC6V




MC7




MC7V




MC8




MC8V




MC9




MC9V




MC10




MC10V




MC11




MC11V




MCQ



MCQO




MCT




MCTO

FRAMED SINGLE-GLASS DOOR LEAF 43 mm thick

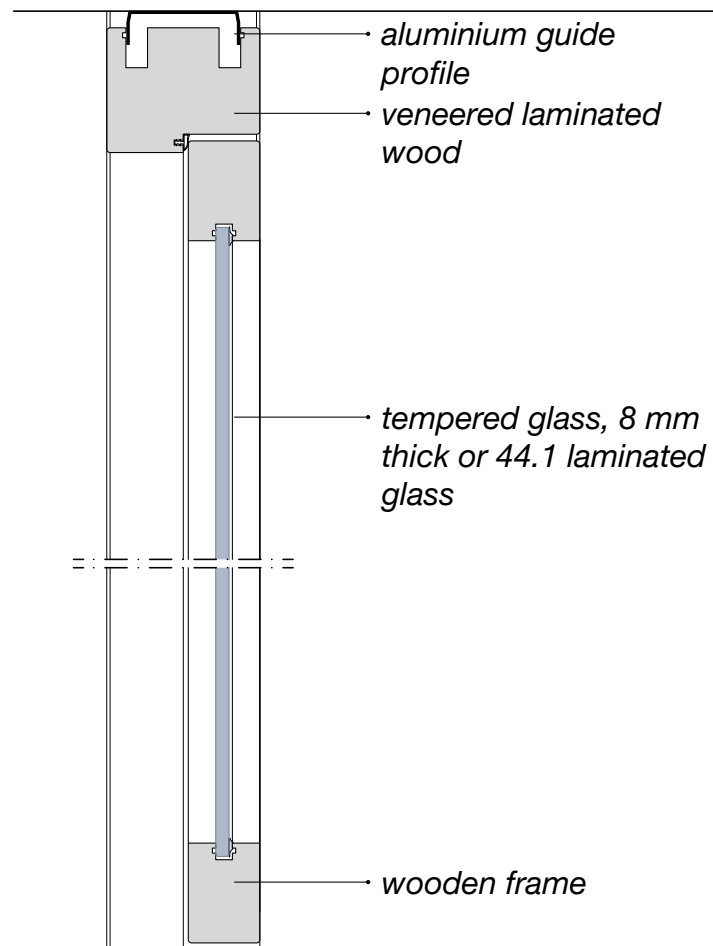


CHARACTERISTICS


- 01.** concealed hinge
- 02.** visible or concealed door closer
- 03.** switch on door upright
- 04.** recessed dust seal

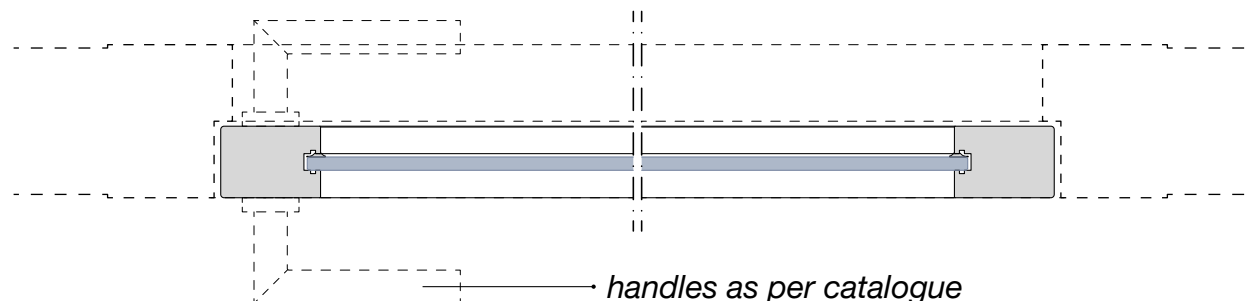


FRAMED SINGLE-GLASS DOOR LEAF 43 mm thick




ML5




ML6




ML7



ML8




ML9




ML11

FRAMED DOUBLE-GLASS DOOR LEAF 92 mm thick

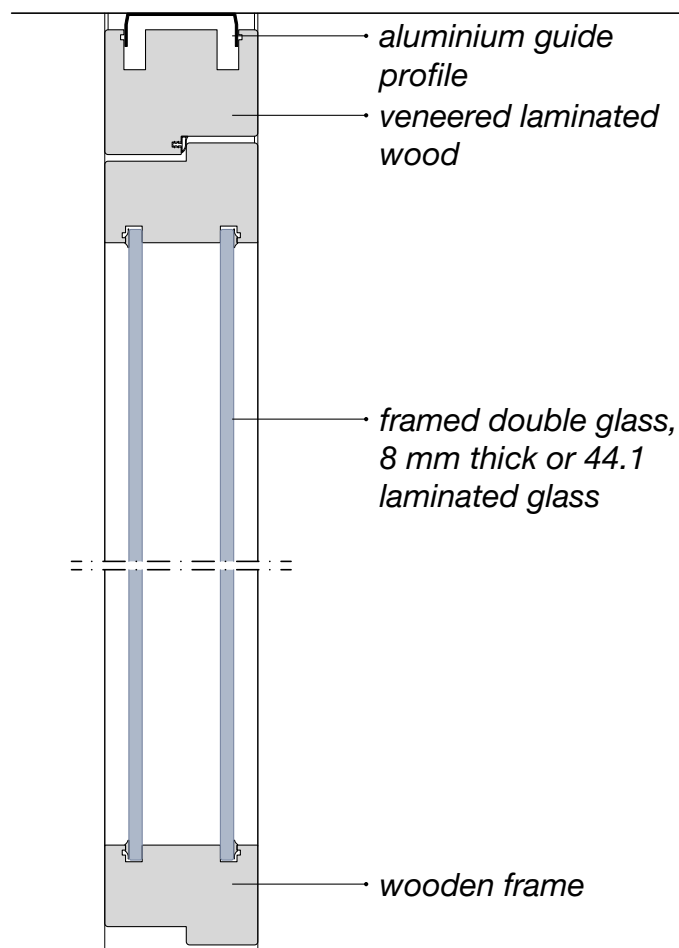


CHARACTERISTICS


- 01.** concealed hinge
- 02.** visible or concealed door closer
- 03.** switch on door upright
- 04.** recessed dust seal

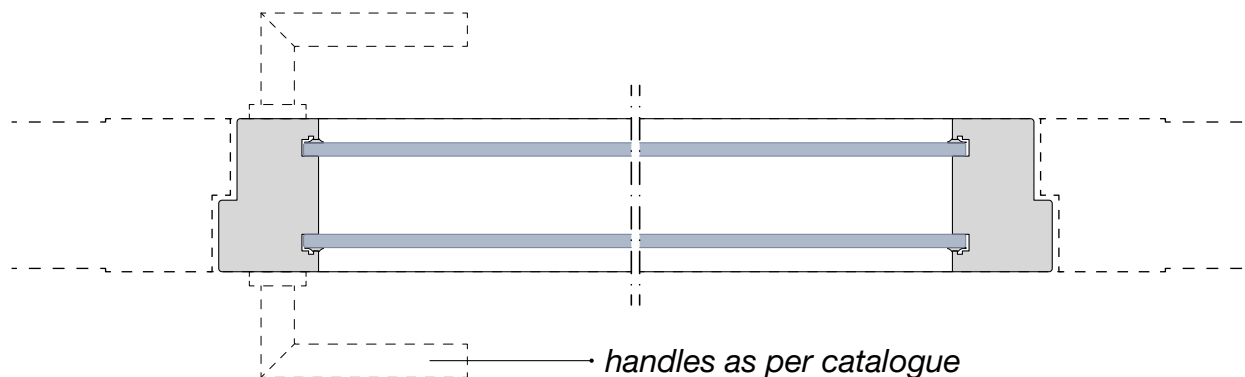


FRAMED DOUBLE-GLASS DOOR LEAF 92 mm thick




ML5




ML6




ML7



ML8



ML9




ML11


FRAMES FOR SLIDING DOORS




Door frame on **Ritmica Wood D1**

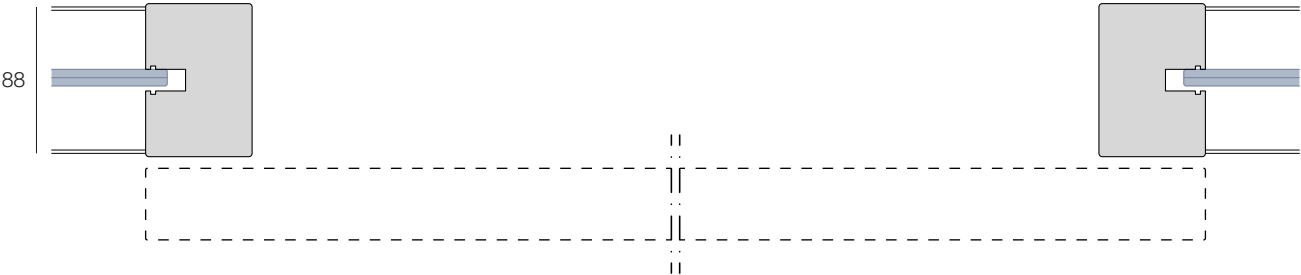


Door frame on **Ritmica Wood D2**

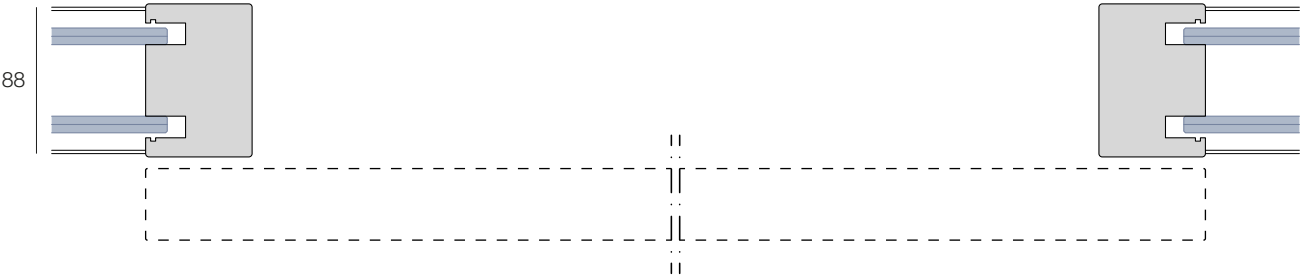

Door frame on **Ritmica Wood Solid**

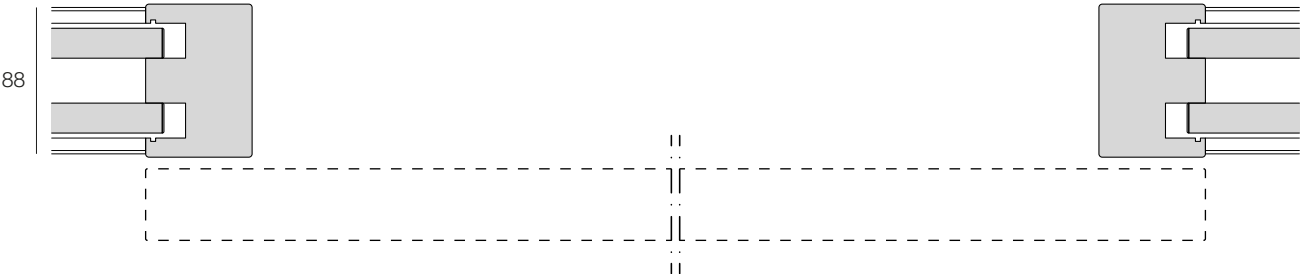


SOLID DOOR LEAF 43 mm thick

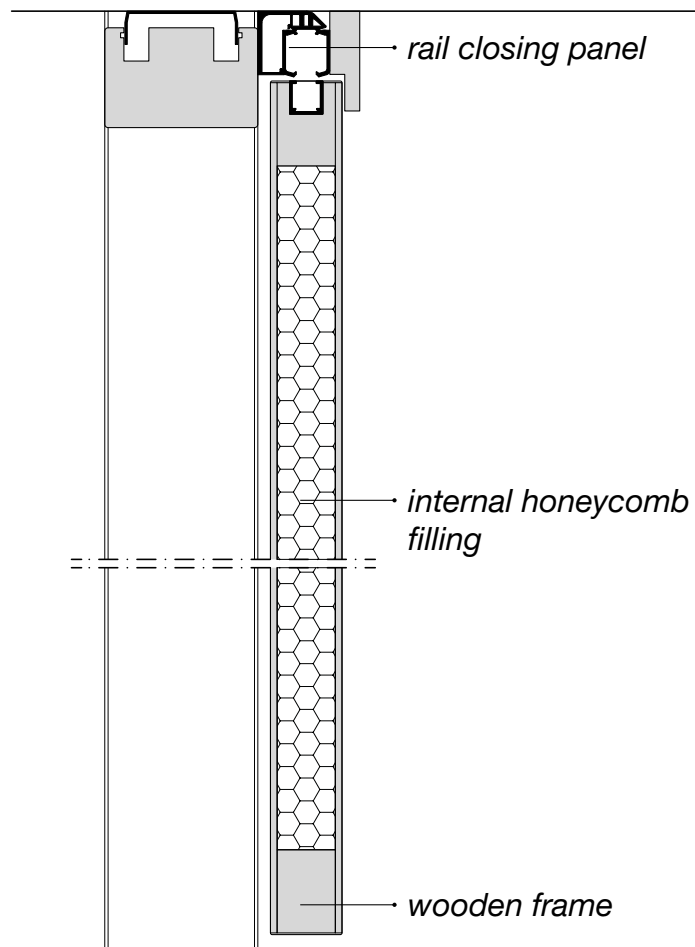


CHARACTERISTICS


- 01.** soft opening-closing mechanism
- 02.** synchronised closing for double-leaf door
- 03.** lock
- 04.** switch on door upright

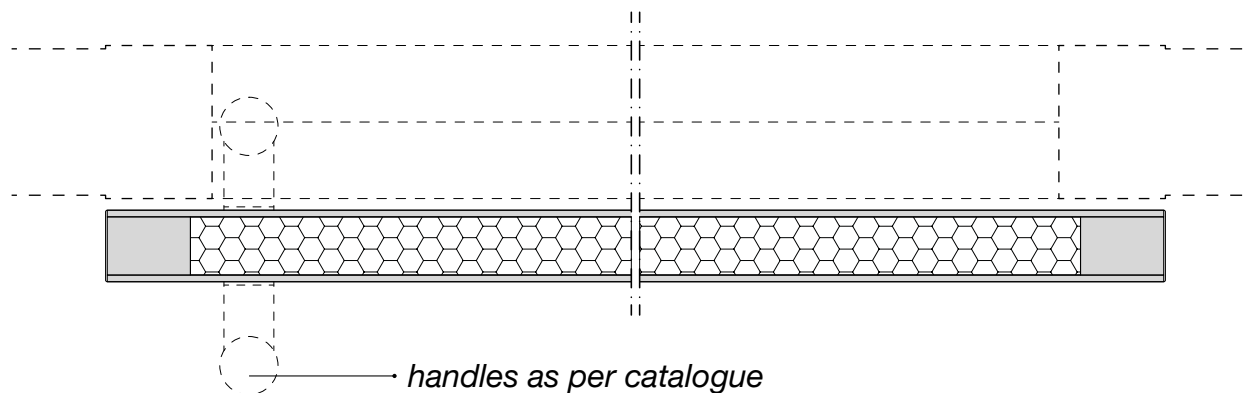

TEMPERED GLASS DOOR LEAF 10 mm thick

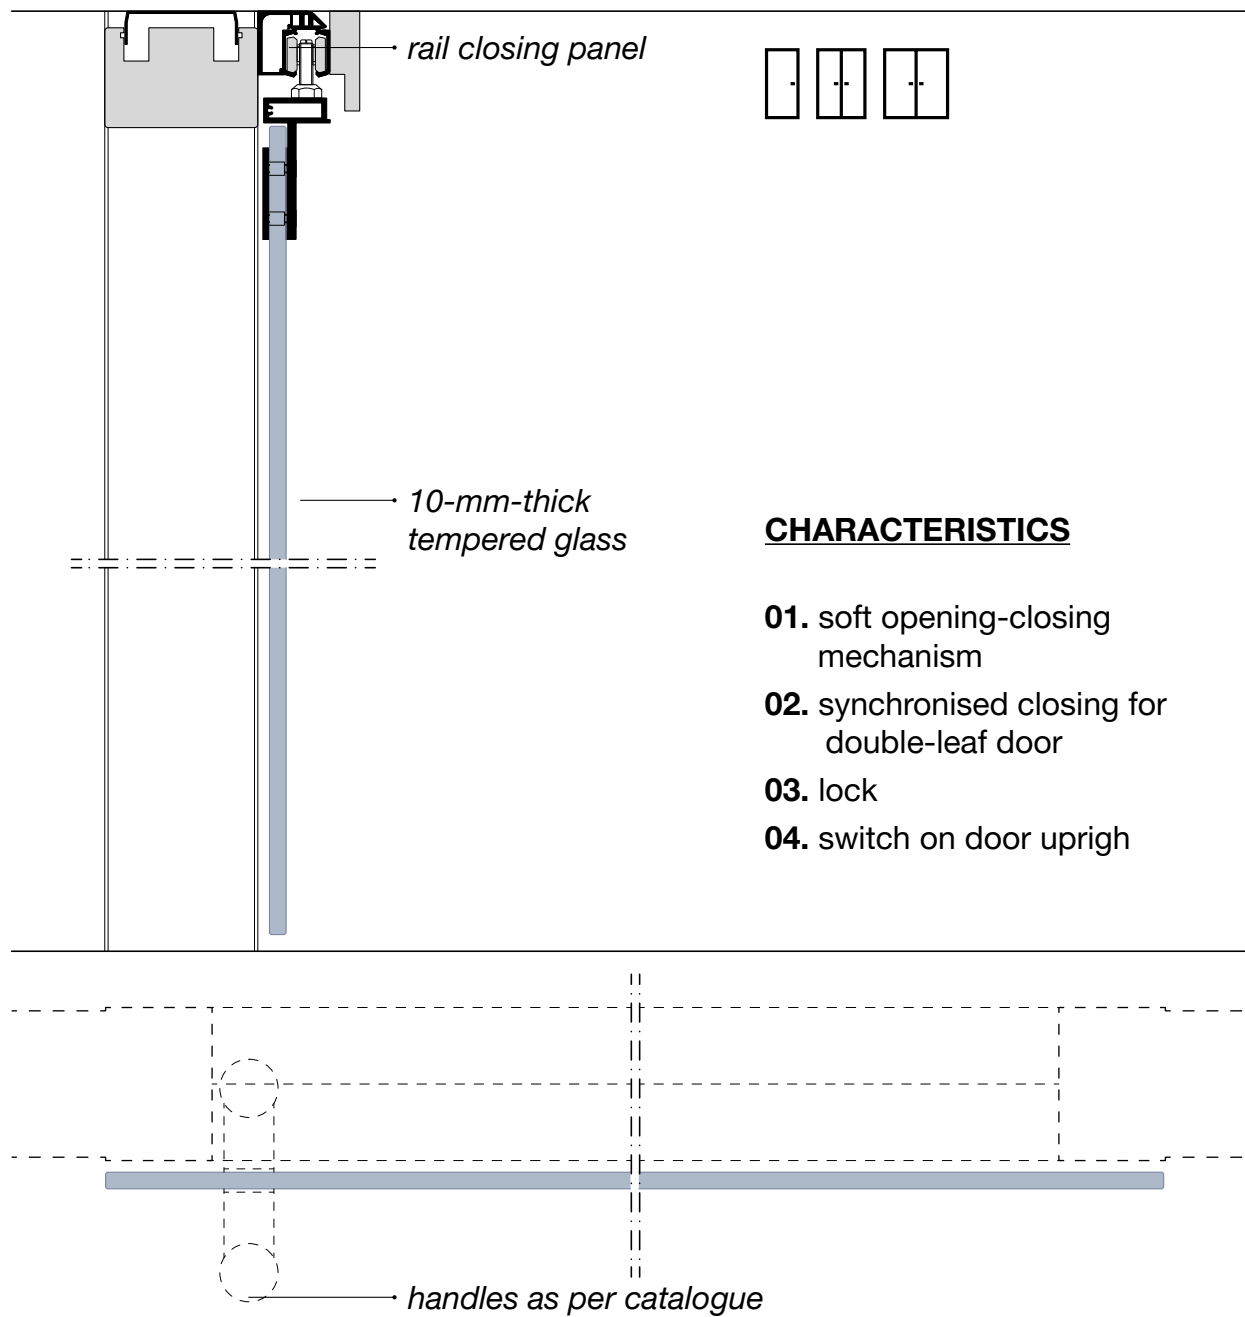


LARGE FRAMED DOOR LEAF 43 mm thick

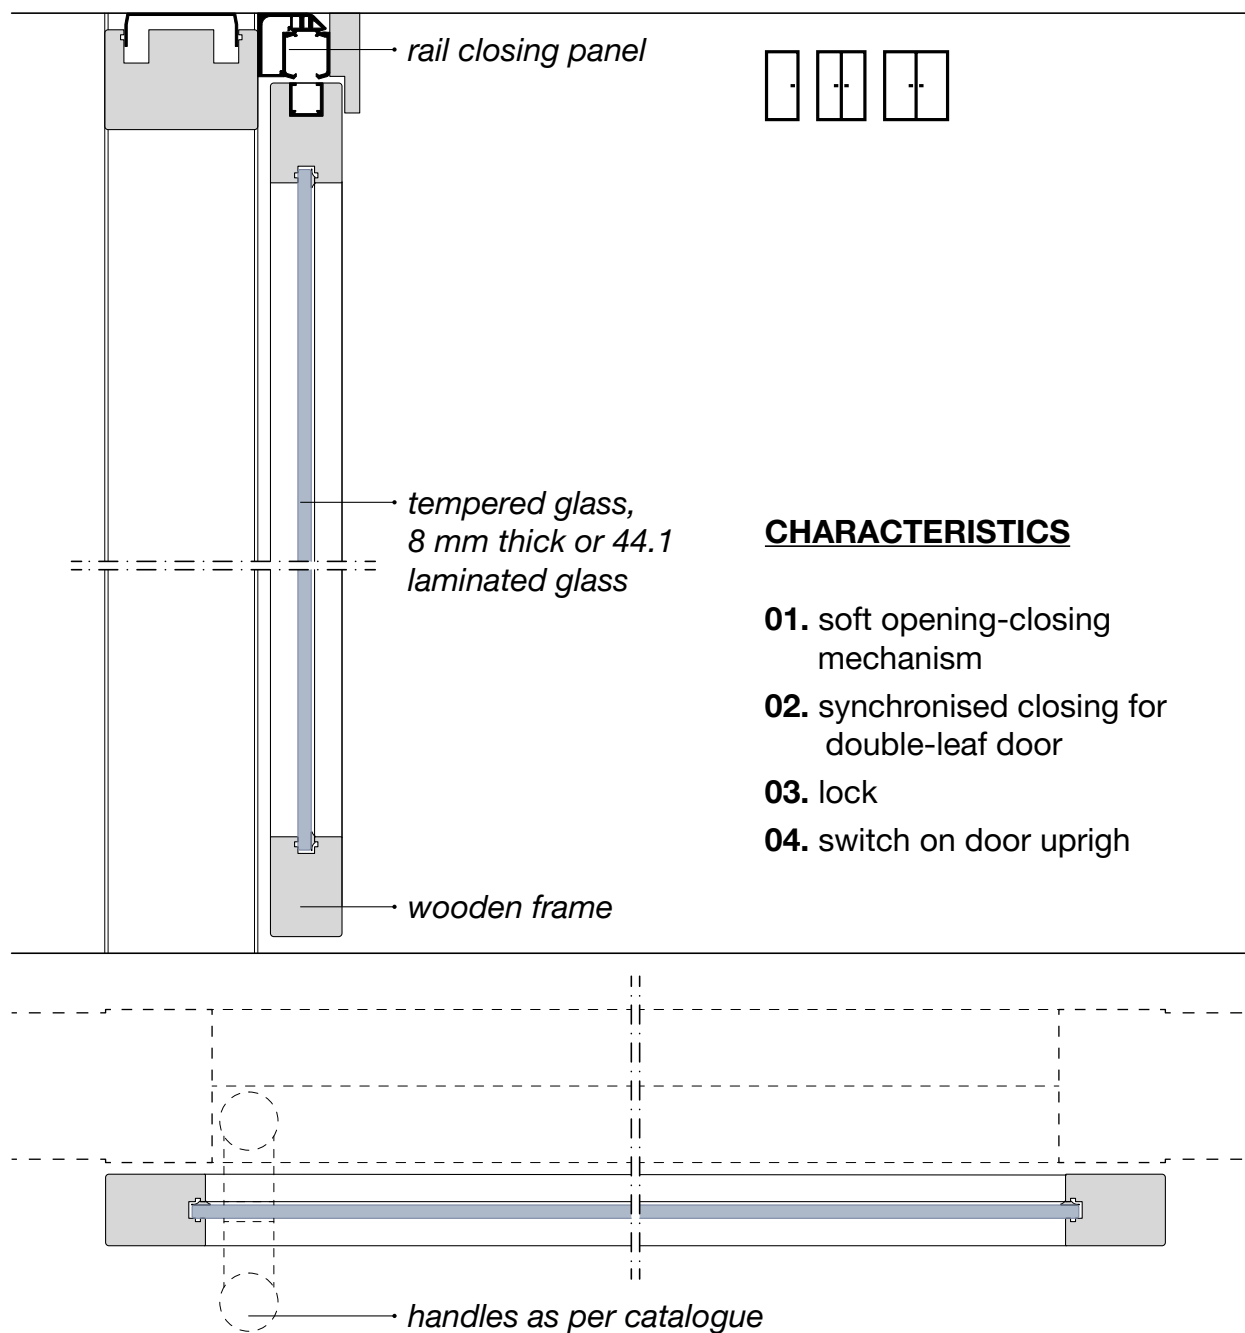


Glass door




STEEL

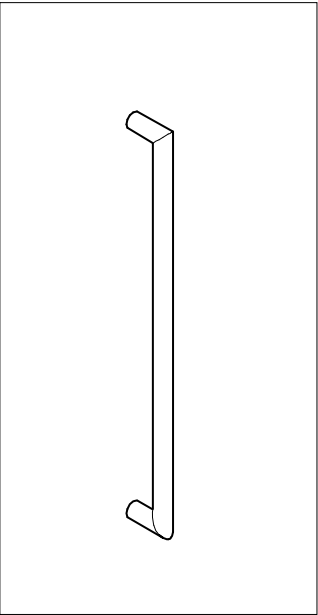


MPOMGH1_H2_H3

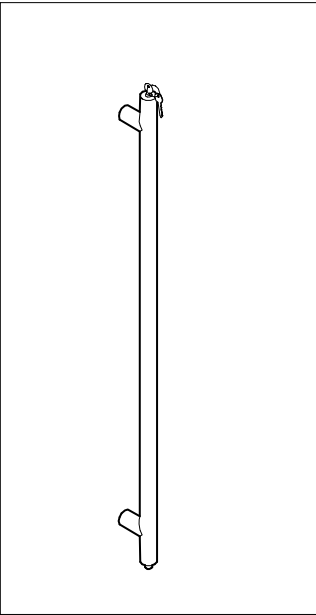


MPOM2

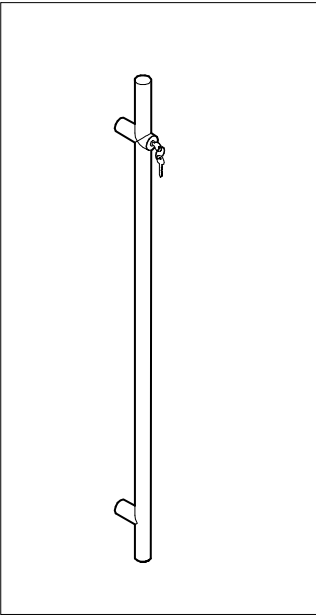


MPOM3

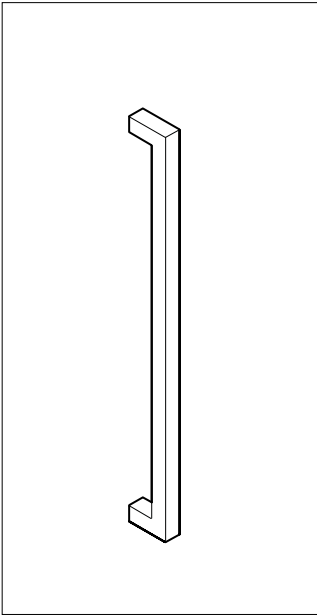

MPOMGH1Q_GH2Q_GH3Q

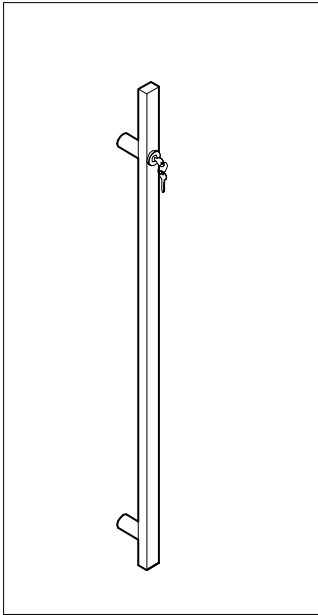


MPOM3Q

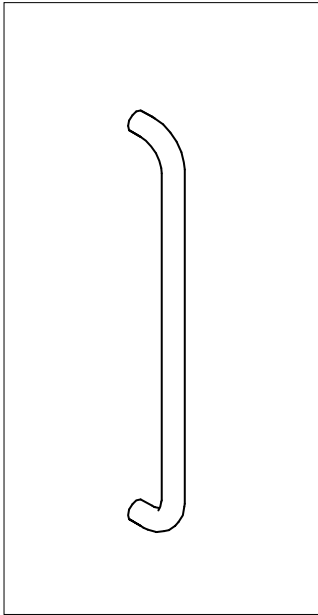


MPOM8

ALUMINIUM

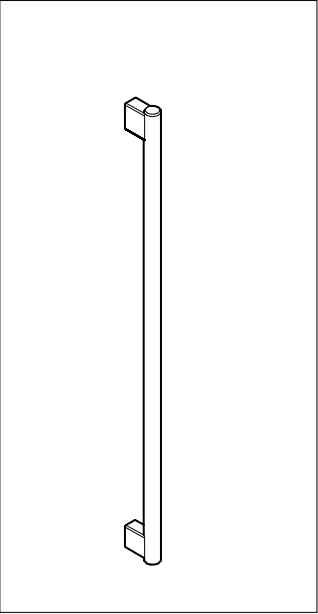

MPOMTH1_TH2

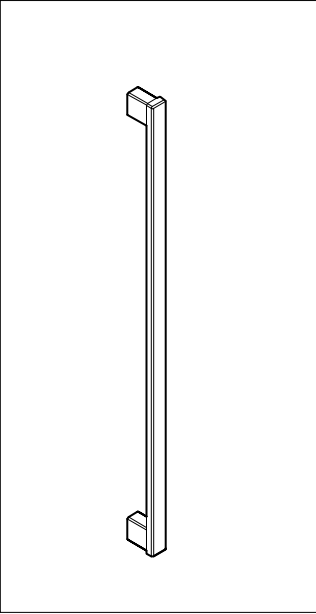


MPOMQH1_QH2


Solid door




STEEL

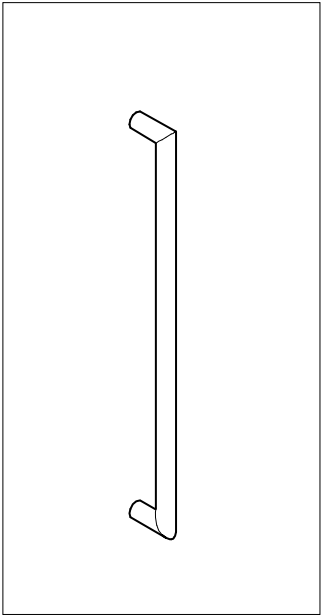


MPOMGH1_H2_H3

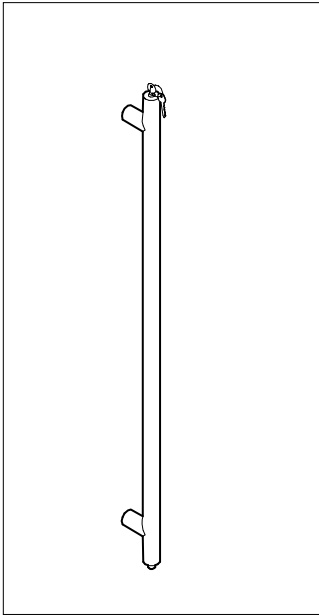

MPOM2

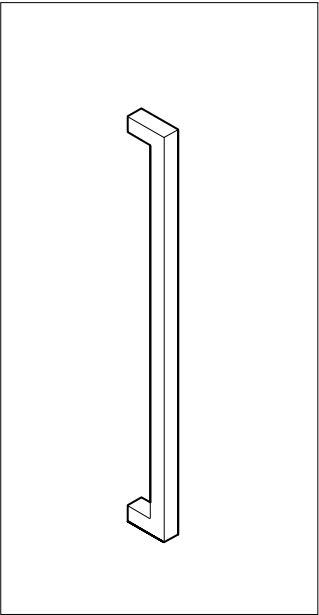


MPOMGH1Q_GH2Q_GH3Q

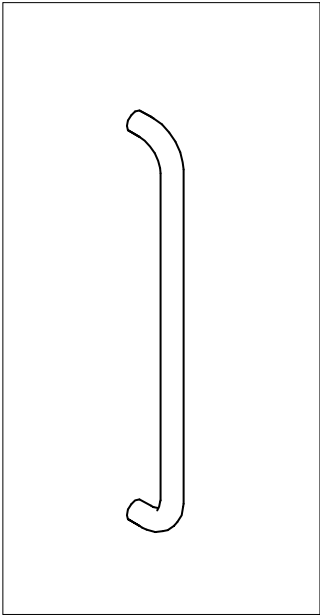


MPOM8


ALUMINIUM

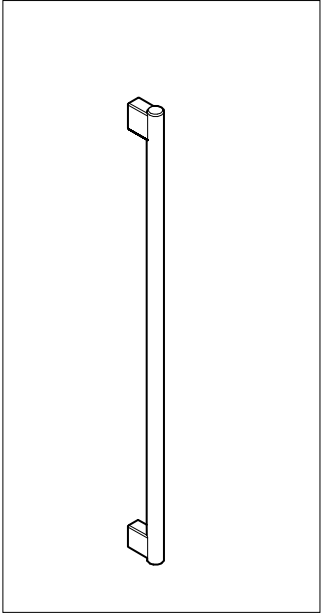


MPOMTH1_TH2

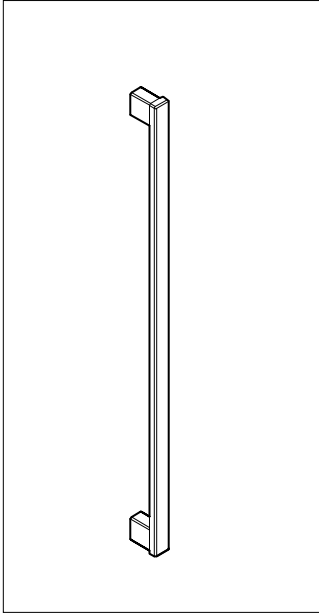

MPOMQH1_QH2

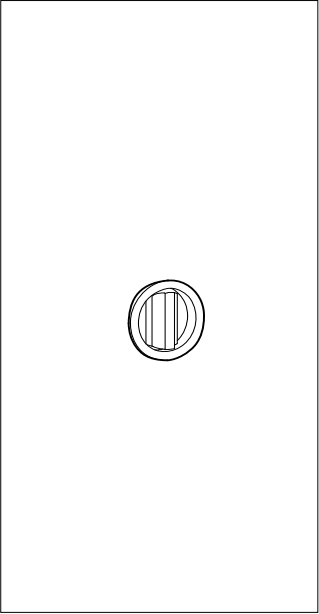

MPOM4

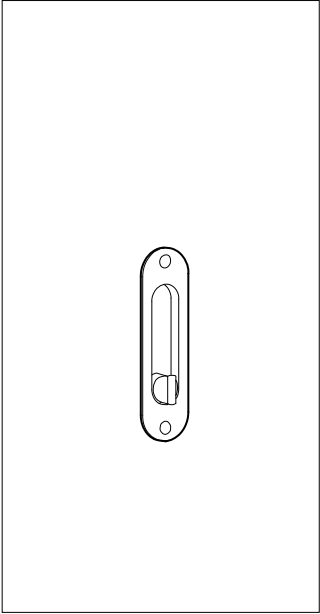


MPOM5

RITMICA®
WOOD


Accessories



Overhead door closer

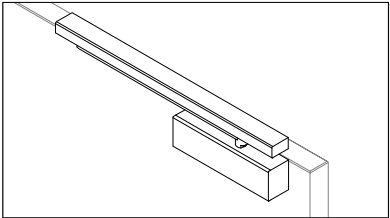


01 external sliding closer
for framed/solid door

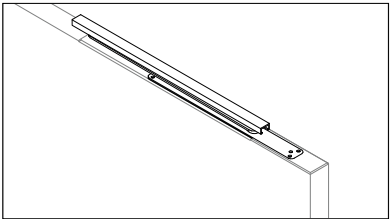


02 concealed closer
for framed/solid door

Floor-mounted door closer

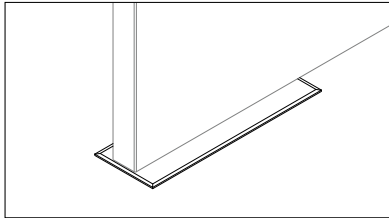


01 floor-mounted
for solid door

Aluminium hinges

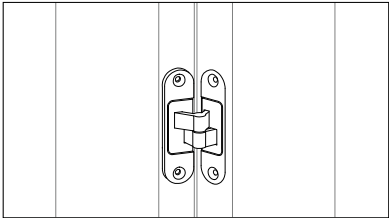


01 concealed
for framed/solid door

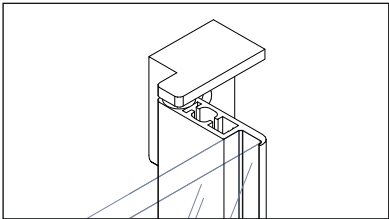


02 full-height hinge
for tempered glass door

Accessories

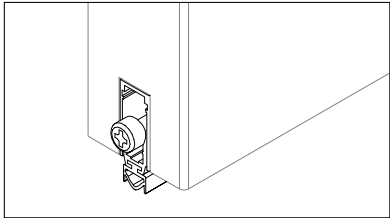

01 concealed soundproofing draft stopper
for framed/solid door

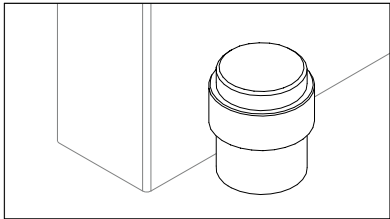

02 door stopper
for solid/framed/tempered glass door

RITMICA®
WOOD

Finishes

Frame




Anodised



01 Natural aluminium



02 Bronze

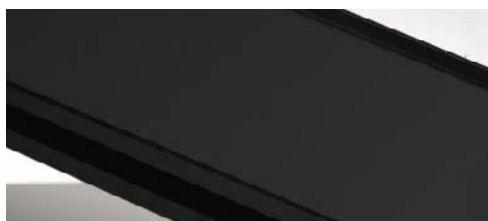

03 Black




04 Custom colour

RAL Finishes



01 White

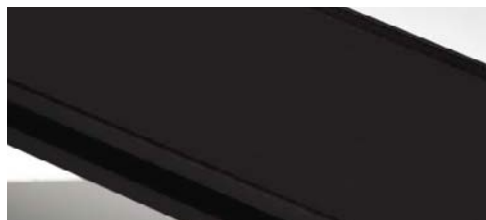

02 Black



03 Custom colour

Polish




01 Shine

Wood



01 Light oak

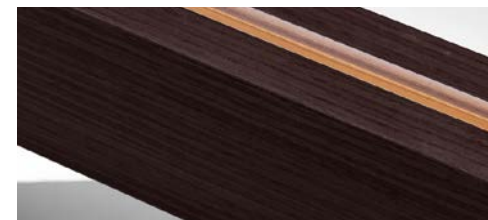


02 Dark oak


Solid panels




CAT. 1

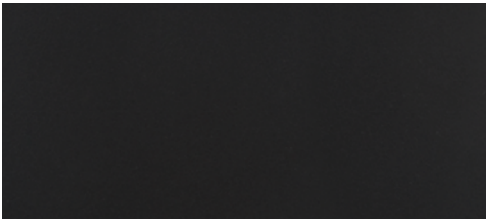

055 Graphite black

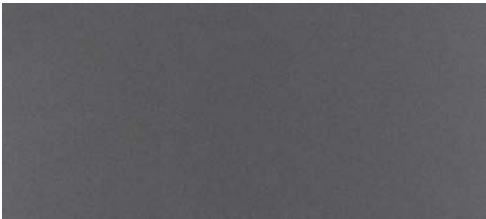

420 Gunmetal

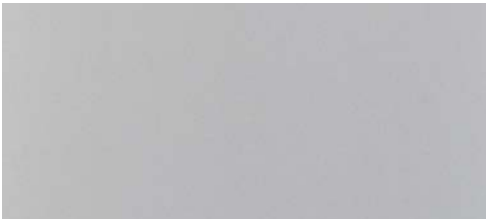


418 Ash grey




419 Light grey




393 Dove grey

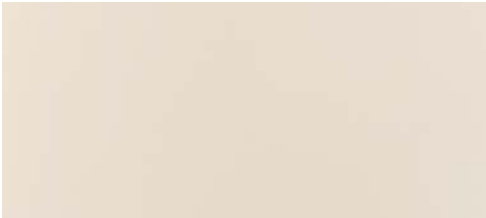

417 Vanilla

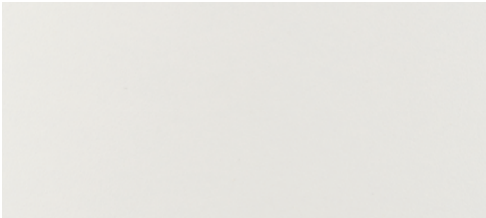

429 Warm white

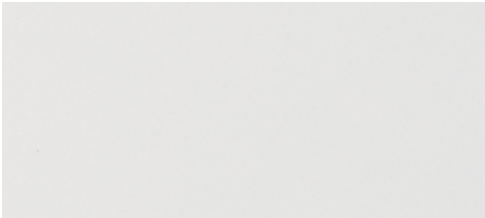


428 Cold white

CAT. 2



422 Silver

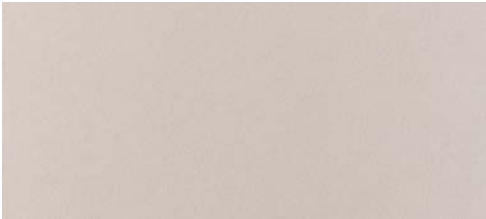


423 Champagne


Woods



CAT. 1

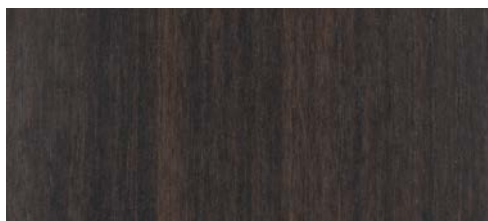

421 Eucaliptus

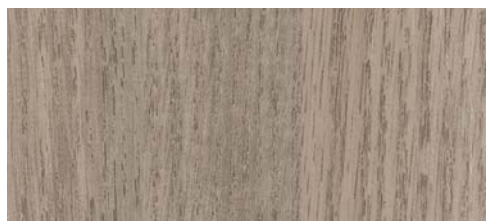

426 Mid-tone oak



274 Acacia



416 Streaked white


CAT. 2




425 Dark walnut



318 Mid-tone walnut

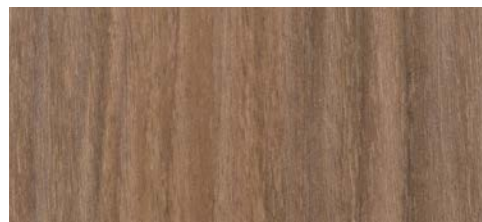

427 Light walnut

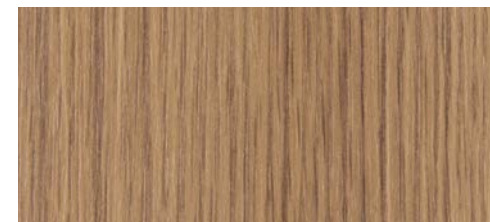


382 Natural oak


CAT. 3




138 Aged saw-cut oak

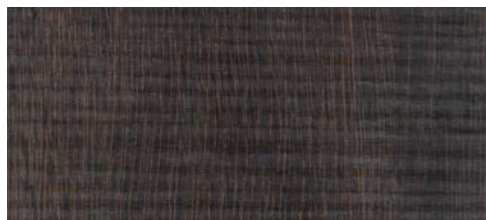

197 Saw-cut eucaliptus

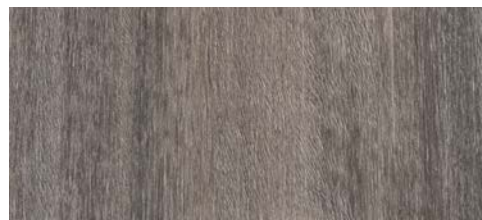

408 Grey oak

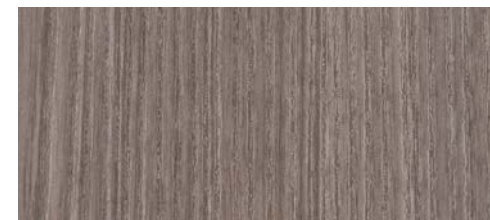

400 Danube oak




414 Red walnut



412 Vintage oak



413 Champagne oak

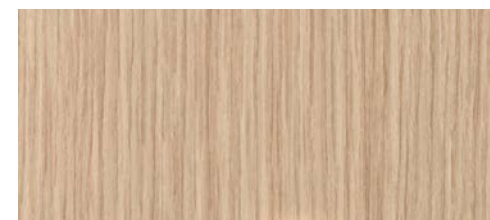

410 Light oak

Textures



CAT. 2



304 Dark-tone fabric



123 Mid-tone fabric




305 Light-tone fabric




424 Oxide

CAT. 3

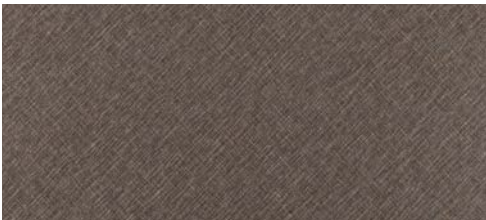

385 Bronze linen

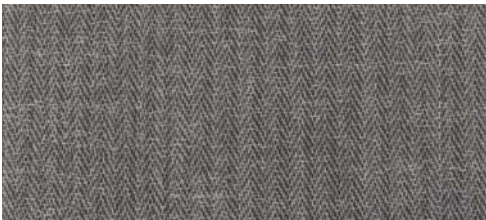

409 Bark



406 Primo fiore grey



405 Primo fiore dove grey



404 Primo fiore beige



415 Desert

Glass



01 Clear



03 Satin



05 Smoked



02 Extra light



04 Bronze



06 Custom painted



Etoile s.r.l. - Società Unipersonale

Via Delle Industrie, 9/B 61040 Sant'Ippolito (PU) Italy

P. +39.0721.85.59.34

info@etoilesrl.it - www.etoilesrl.it